



Test Report

No.: CTL1712182081-R

Date: Dec. 20, 2017

Page 1 of 4

Applicant:

Address:

Address:

The following sample(s) was/were submitted and identified on behalf of the clients as:

The battery

Model(s): 053040 300MAH

Date of Sample Received : Dec. 19, 2017

Testing Period : Dec. 19, 2017 to Dec. 20, 2017

Test Requested : Selected test(s) as requested by client.

Test Method : Please refer to next page(s).

Test Results : Please refer to next page(s).

Conclusion : Based on the performed tests on submitted sample(s), the results **comply with**
The Battery Directive 2006/66/EC, Revision Directive 2013/56/EU.

Tested by:

Kendy Wang

Approved by:



Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Tel: +86-0755-89486194

E-mail: cti@ctl-lab.com

Web: www.ctl-lab.com

Test Report

No.: CTL1712182081-R

Date: Dec. 20, 2017

Page 2 of 4

Elementary Analysis

Test Item(s)	Unit	Test Method(Reference)	Result	MDL
Cadmium (Cd)	%(w/w)	IEC 62321:2008,ICP-OES	N.D.	0.0010
Lead (Pb)	%(w/w)	IEC 62321:2008,ICP-OES	N.D.	0.0010
Mercury (Hg)	%(w/w)	IEC 62321:2008,ICP-OES	N.D.	0.0001

Note:

- 1 mg/kg = 1 ppm = 0.0001%
2. N.D. = Not Detectde(<MDL)
3. MDL = Method Detection Limit
4. Results shown are of total weight of the battery sample.

Remark: According to Directive 2006/66/EC and Amendment 2013/56/EU;

1. Without prejudice to directive 2000/53/EC, Member States shall prohibit the placing on the market of : (a) All batteries or accumulators, whether or not incorporated into appliances, that contain more than 0.0005% of mercury by weight. (b) Portable batteries or accumulators, including those incorporated into appliances, that contain more than 0.002% of cadmium by weight.
2. The prohibition set out in paragraph 1(a) shall not apply to button cells with a mercury content of no more than 2% by weight.
3. The prohibition set out in paragraph 1(b) shall not apply to portable batteries and accumulators intended for use in :
 - (a) emergency and alarm systems, including emergency lighting
 - (b) medical equipment; or
 - (c) cordless power tools.
4. Batteries, accumulators and button cells containing more than 0.004% lead, shall be marked with the chemical symbol for the metal concerned: Pb.

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Tel: +86-0755-89486194

E-mail:ctl@ctl-lab.com

Web: www.ctl-lab.com

Test Report


No.: CTL1712182081-R

Date: Dec. 20, 2017

Page 3 of 4

AT TACH MENT S

Battery Testing Flow Chart

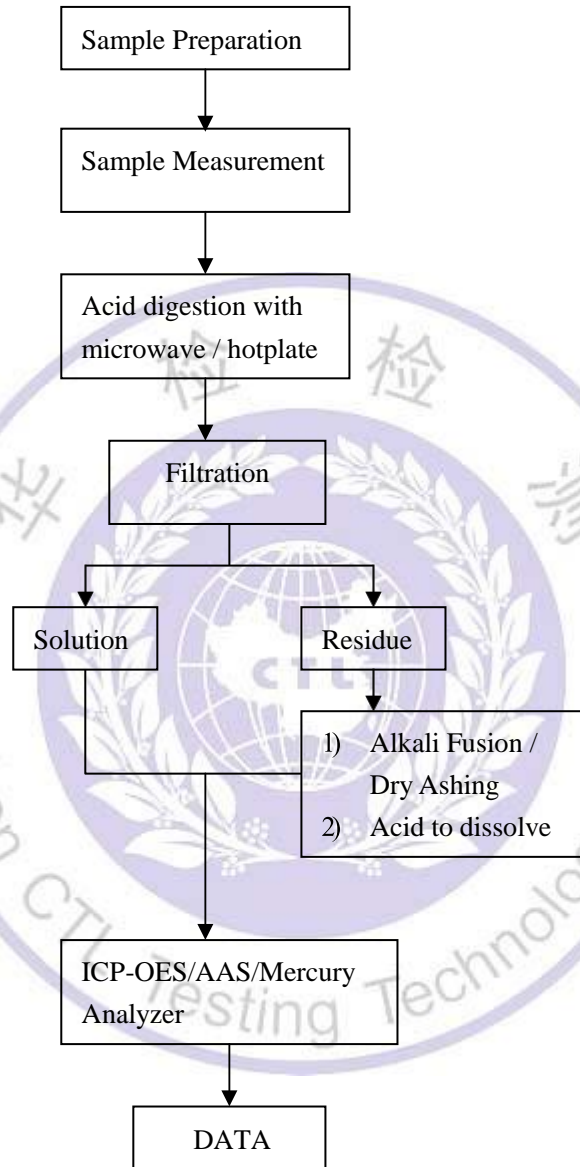


Test Report

No.: CTL1712182081-R

Date: Dec. 20, 2017

Page 4 of 4

Sample photo:

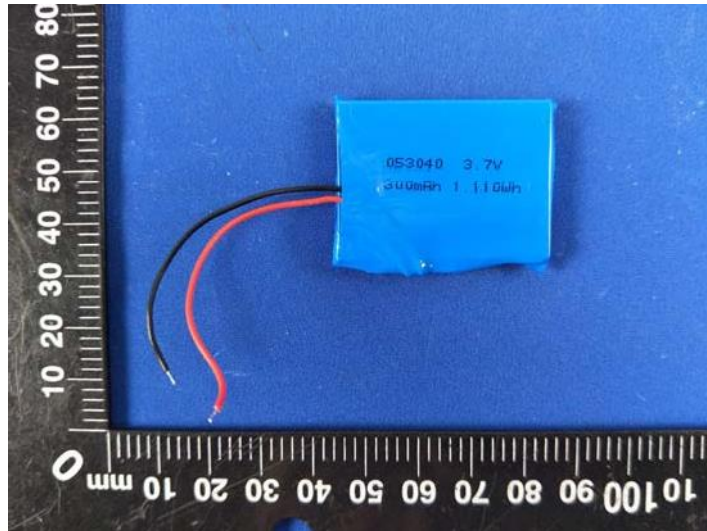

End of Report



IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC

CB TEST CERTIFICATE

CERTIFICAT D'ESSAI OC

Product
Produit

Cylindrical Lithium-ion Cell

Name and address of the applicant
Nom et adresse du demandeur

Name and address of the manufacturer
Nom et adresse du fabricant

Name and address of the factory
Nom et adresse de l'usine

Ratings and principal characteristics
Valeurs nominales et caractéristiques principales

3.7V, 300mAh, 1.11Wh

Trademark (if any)
Marque de fabrique (si elle existe)

Type of Manufacturer's Testing Laboratories used
Type de programme du laboratoire d'essais constructeur

N/A

Model / Type Ref.
Ref. de type

SZNS053040 - 300mAh

Additional information (if necessary may also be
reported on page 2)
Les informations complémentaires (si nécessaire,
peuvent être indiqués sur la 2^{ème} page)

A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à la

IEC 62133 2017
National differences see test report

As shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue partie de ce Certificat

17044062 001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification



TÜV Rheinland Japan Ltd.
Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku
Yokohama 224-0021 Japan
Phone + 81 45 914-3888
Fax + 81 45 914-3354
Mail: info@jpn.tuv.com
Web: www.tuv.com

Date: 14.02.2017

Signature:

Dipl.-Ing. Univ. S. O. Steinke



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications

Report Number.....: 17044062 001
Date of issue.....: 2017-02-14
Total number of pages..... 25 pages

Applicant's name.....:
Address

Test specification:

Standard: IEC 62133: 2017 (Second Edition)
Test procedure: CB Scheme
Non-standard test method.....: N/A

Test Report Form No.....: IEC62133B
Test Report Form(s) Originator: UL(Demko)
Master TRF: Dated 2017-02

Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.


This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

Test item description: Cylindrical Lithium-ion Cell
Trade Mark: N/A
Manufacturer.....: Same as applicant
Address: Same as applicant
Model/Type reference: SZNS053040-300mAh
Ratings: 3.7V, 300mAh, 1.11Wh

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.
Testing location/ address		3&4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		
Tested by (name + signature).....:		Maggie Guo
Approved by (name + signature)		Charlie Zeng
<i>Maggie Guo</i> <i>Charlie Zeng</i>		
<input type="checkbox"/>	Testing procedure: TMP	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT	
Testing location/ address		
Tested by (name + signature).....:		
Witnessed by (name + signature)		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: SMT	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature).....:		

List of Attachments (including a total number of pages in each attachment): Attachment 1: Photo documentation (2 pages).	
Summary of testing:	
Tests performed (name of test and test clause): cl.5.6.2 Design recommendation(Lithium system); cl.8.1 Charging procedure for test purposes (for Cells and Batteries); cl.8.2.1 Continuous charging at constant voltage (Cells); cl.8.3.1 External short circuit (Cells); cl.8.3.3 Free fall (Cells); cl.8.3.4 Thermal abuse (Cells); cl.8.3.5 Crush (Cells); cl.8.3.7 Forced discharge (Cells); cl.8.3.8 Transport tests (Cells); cl.8.3.9 Forced internal short circuit (Cells). Charging method declared by the manufacturer in specifications: 1). Charging the cell with 500mA constant current and 4.2V constant voltage until current reduces to 25mA at ambient 20°C±5°C for clause 8.2.1, 8.3.3, 8.3.7 and 8.3.8; 2). Charging procedure of clause 8.1.2 applied for clause 8.3.1, 8.3.4, 8.3.5 and 8.3.9. Tests are made with the number of cells specified in IEC 62133: 2017 (Second Edition) Table 2.	Testing location: TÜV Rheinland (Shenzhen) Co., Ltd. 3&4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China
Summary of compliance with National Differences: BE, BY, CN, DE, DK, FI, FR, GB, HU, JP, KR, NL, NO, SE, SG. BE=Belgium, BY=Belarus, CN=China, DE=Germany, DK=Denmark, FI=Finland, FR=France, GB=United Kingdom, HU=Hungary, JP=Japan, KR=Republic of Korea, NL=The Netherlands, NO=Norway, SE=Sweden, SG=Singapore.	
<input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN62133: 2013</u>	

Copy of marking plate:



Test item particulars	
Classification of installation and use	N/A
Supply connection	DC Connector
Recommend charging method declared by the manufacturer	Charging the cell with 300mA constant current and 4.2V constant voltage until the current reduces to 42mA at ambient 20°C±5°C
Discharge current (0,2 I_t A)	60mA
Specified final voltage	2.75V
Chemistry	<input type="checkbox"/> nickel systems..... <input checked="" type="checkbox"/> lithium systems
Recommend of charging limit for lithium system	
Upper limit charging voltage per cell	4.25V
Maximum charging current	300mA
Charging temperature upper limit	45°C
Charging temperature lower limit	0°C
Polymer cell electrolyte type	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object	: N/A
- test object does meet the requirement	: P (Pass)
- test object does not meet the requirement	: F (Fail)
Testing	
Date of receipt of test item	: Feb 03, 2017
Date (s) of performance of tests	: Feb 03, 2017– Feb 13, 2017
General remarks:	
<p>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC60080-02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	: Same as applicant

General product information:

The cell consists of the positive electrode plate, negative electrode plate, separator, electrolyte, case and assembled sealing cap. The positive and negative electrode plates are housed in the case in the state being separated by the separator, and the assembled sealing cap is fit to the case.

The main features of the cell are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
SZNS 053040-300mAh	300mAh	3.7V	60mA	60mA	60mA	60mA	4.2V	2.75V

The main features of the cell are shown as below (clause 8.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
SZNS 053040-300mAh	4.25V	150mA	0°C	45°C

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
4	Parameter measurement tolerances		P
	Parameter measurement tolerances		P
5	General safety considerations		P
5.1	General		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ) :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism facilitated on cells.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		P
5.4	Temperature/voltage/current management		N/A
	Batteries are designed such that abnormal temperature rise conditions are prevented		N/A
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		N/A
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified		N/A
5.5	Terminal contacts		P
	Terminals have a clear polarity marking on the external surface of the battery	See page 4	P

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector contacts complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries	Cell only	N/A
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	Each battery has an independent control and protection		N/A
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N/A
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		N/A
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N/A
5.6.2	Design recommendation for lithium systems only	Cell only	N/A
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or		N/A
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N/A

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N/A
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2008 certificate provided.	P
6	Type test conditions		P
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Lithium system.	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	Tests are carried out at 20°C ± 5°C.	P
7	Specific requirements and tests (nickel systems)		N/A
7.1	Charging procedure for test purposes	Lithium system.	N/A
7.2	Intended use		N/A
7.2.1	Continuous low-rate charging (cells)		N/A
	Results: No fire. No explosion		N/A
7.2.2	Vibration		N/A
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N/A
7.2.3	Moulded case stress at high ambient temperature		N/A
	Oven temperature (°C).....:.....:		—

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
7.2.4	Temperature cycling		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3	Reasonably foreseeable misuse		N/A
7.3.1	Incorrect installation cell		N/A
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N/A
	- A stabilized dc power supply.		N/A
	Results: No fire. No explosion..... : (See Table 7.3.1)		N/A
7.3.2	External short circuit		N/A
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	Results: No fire. No explosion..... : (See Table 7.3.2)		N/A
7.3.3	Free fall		N/A
	Results: No fire. No explosion.		N/A
7.3.4	Mechanical shock (crash hazard)		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3.5	Thermal abuse		N/A
	Oven temperature (°C)..... : —		—
	Results: No fire. No explosion.		N/A
7.3.6	Crushing of cells		N/A
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N/A
	Results: No fire. No explosion..... : (See Table 7.3.6)		N/A
7.3.7	Low pressure		N/A
	Chamber pressure (kPa)..... : —		—

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire. No explosion. No leakage.		N/A
7.3.8	Overcharge		N/A
	Results: No fire. No explosion..... : (See Table 7.3.8)		N/A
7.3.9	Forced discharge		N/A
	Results: No fire. No explosion..... : (See Table 7.3.9)		N/A

8	Specific requirements and tests (lithium systems)		P
8.1	Charging procedures for test purposes		P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	Charge temperature 0-45°C declared. -5°C used for lower limit test.	P
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)		P
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide systems.	N/A
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)		N/A
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Results: No fire. No explosion..... : (See Table 8.2.1)		P
8.2.2	Moulded case stress at high ambient temperature (battery)		N/A
	Oven temperature (°C)..... :		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)		P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)		N/A
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.2)	N/A
8.3.3	Free fall		P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at 130°C ± 2°C for: - 10 minutes; or	Tested complied.	P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N/A
	Oven temperature (°C)	130°C	—
	Gross mass of cell (g)	<500g, small cell.	—
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or	Tested complied.	P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N/A
	- 10% of deformation has occurred compared to the initial dimension		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.5)	P
8.3.6	Over-charging of battery		N/A
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N/A
	- Returned to ambient		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.6)	N/A

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
8.3.7	Forced discharge (cells)		P
	Results: No fire. No explosion..... :	(See Table 8.3.7)	P
8.3.8	Transport tests		P
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	T-1, T-2, T-3 and T-4 tested complied. No leakage, no venting, no short-circuit, no rupture, no explosion and no fire. T-5, See Table 8.3.8. T-6 can be replaced by test of clause 8.3.5.	P
8.3.9	Design evaluation – Forced internal short circuit (cells)	Tested complied.	P
	The cells complied with national requirement for.....:	France, Japan, Korea and Switzerland.	—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800N	P
	Results: No fire :	(See Table 8.3.9)	P
9	Information for safety		P
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Information for safety mentioned in manufacturer's specifications.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.		N/A
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
10	Marking		P
10.1	Cell marking		P
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	See marking plate on page 4.	P
10.2	Battery marking		N/A

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries marked in accordance with the requirements for the cells from which they are assembled.		N/A
	Batteries marked with an appropriate caution statement.		N/A
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.	Information for disposal instructions mentioned in manufacturer's specifications.	P
	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
11	Packaging		P
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P
Annex A	Charging range of secondary lithium ion cells for safe use		P
A.1	General		P
A.2	Safety of lithium-ion secondary battery		N/A
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage		P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-45°C	P
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N/A
A.4.3.1	General		N/A

IEC 62133: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N/A
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N/A
A.4.4	Low temperature range	Charging low temperature declared by client is: 0°C.	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	-5°C.	P
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle to cylindrical cell		P
A.5.5.1	Insertion of nickel particle to winding core		P
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		P
A.5.6	Insertion of nickel particle to prismatic cell		N/A

TABLE: Critical components information					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell		SZNS053040-300mAh	3.7V, 300mAh	IEC 62133: 2012	Test with appliance
Anode		KL206	Particle size D50 : 12.0±2.0µm BET surface area: 0.5m ² /g Tap density: 2.2g/cm ³	--	--
Cathode		ZN-3A	Particle size D50 : 17.0±2.0µm BET surface area: 5.0±0.3m ² /g Tap density: 1.1g/cm ³	--	--
Separator		60*17S3	Width: 60±0.5mm Thickness:0.017±0.001mm Porosity(%):40-47; Shutdown temp:135°C	--	--
Electrolyte		13750	Density: 1.262±0.005g/cm ³ Conductivity: 10.72±0.5mS/cm	--	--
Outer case		17.66*63	Height: 68.3±0.05mm Inner diameter: 17.66±0.05mm	--	--
PTC		PTC18R	Vmax:15V; Ih:2.5A; It:5.0A Tmoa:85°C	UL 1434	UL E340030
Supplementary information:					
¹⁾ Provided evidence ensures the agreed level of compliance.					

7.2.1	TABLE: Continuous low rate charge (cells)					N/A
Model	Recommended charging method, (CC, CV, or CC/CV)	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (A)	OCV at start of test, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 						

7.2.2	TABLE: Vibration		N/A
Model	OCV at start of test, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 			

7.3.1	TABLE: Incorrect installation (cells)			N/A
Model	OCV of reversed cell, (Vdc)		Results	
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)				

7.3.2	TABLE: External short circuit					N/A
Model	Ambient (at 20°C ± 5°C or 55°C ± 5°C)	OCV at start of test, (Vdc)	Resistance of circuit, (Ω)	Maximum case temperature rise ΔT, (°C)	Results	
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)						

7.3.6	TABLE: Crush			N/A
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 				

7.3.8	TABLE: Overcharge			N/A
Model	OCV prior to charging, (Vdc)	Maximum charge current, (A)	Time for charging, (hours)	Results
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 				

7.3.9	TABLE: Forced discharge (cells)				N/A
Model	OCV before application of reverse charge, (Vdc)	Measured reverse charge I_t , (A)	Time for reversed charge, (minutes)	Results	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 					

8.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Model	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (A)	OCV at start of test, (Vdc)	Results	
#1	4.2	0.5	4.16	P	
#2	4.2	0.5	4.17	P	
#3	4.2	0.5	4.16	P	
#4	4.2	0.5	4.16	P	
#5	4.2	0.5	4.17	P	
Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage 					

8.3.1	TABLE: External short circuit (cell)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_c , (°C)	Results	
Samples charged at charging temperature upper limit (45°C)						
#1	18.8	4.16	80	36.5	P	
#2	18.8	4.16	80	39.9	P	
#3	18.8	4.17	80	38.6	P	
#4	18.8	4.16	80	38.8	P	
#5	18.8	4.16	80	35.8	P	
Samples charged at charging temperature lower limit (-5°C)						
#6	18.8	4.16	80	28.9	P	
#7	18.8	4.16	80	30.4	P	
#8	18.8	4.17	80	31.2	P	
#9	18.8	4.16	80	33.2	P	
#10	18.8	4.16	80	32.0	P	
Supplementary information: - No fire or explosion						

8.3.2	TABLE: External short circuit (battery)					N/A
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_c , (°C)	Results	
Samples charged at charging temperature upper limit (°C)						
Samples charged at charging temperature lower limit (°C)						
Supplementary information: - No fire or explosion						

8.3.5	TABLE: Crush					P
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
Samples charged at charging temperature upper limit (45°C)						
Cell #1	4.16	--	--	--	P	
Cell #2	4.16	--	--	--	P	
Cell #3	4.17	--	--	--	P	
Cell #4	4.17	--	--	--	P	
Cell #5	4.16	--	--	--	P	
Samples charged at charging temperature lower limit						
Cell #6	--	--	--	--	--	
Cell #7	--	--	--	--	--	
Cell #8	--	--	--	--	--	
Cell #9	--	--	--	--	--	
Cell #10	--	--	--	--	--	
<p>Note: A 13kN force applied at the wide side of cylindrical cells. No voltage abrupt drop occurred. Supplementary information: - No fire or explosion</p>						

8.3.6	TABLE: Over-charging of battery				N/A
Constant charging current (A).....:					—
Supply voltage (Vdc).....:					—
Model	OCV before charging, (Vdc)	Resistance of circuit, (mΩ)	Maximum outer casing temperature, (°C)	Results	
Supplementary information: - No fire or explosion					

8.3.7	TABLE: Forced discharge (cells)				P
Model	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I _r , (A)	Time for reversed charge, (minutes)	Results	
#1	3.39	2.5	90	P	
#2	3.40	2.5	90	P	
#3	3.39	2.5	90	P	
#4	3.40	2.5	90	P	
#5	3.39	2.5	90	P	
Supplementary information: - No fire or explosion					

8.3.8 T-5	TABLE: External short circuit (cell)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT_c (°C)	Results	
#1	54.0	4.16	80	23.9	P	
#2	54.0	4.16	80	24.7	P	
#3	54.0	4.16	80	25.8	P	
#4	54.0	4.16	80	27.8	P	
#5	54.0	4.16	80	22.1	P	
#6	56.5	4.16	80	22.0	P	
#7	56.5	4.16	80	26.1	P	
#8	56.5	4.17	80	28.0	P	
#9	56.5	4.16	80	25.4	P	
#10	56.5	4.16	80	28.4	P	
<p>Supplementary information: The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence. - No fire or explosion</p>						

8.3.9	TABLE: Forced internal short circuit (cells)					P
Model	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location ¹⁾	Maximum applied pressure, (N)	Results	
#1	10	4.167	1	800	P	
#2	10	4.171	1	800	P	
#3	10	4.172	1	800	P	
#4	10	4.173	2	800	P	
#5	10	4.169	2	800	P	
#6	45	4.170	1	800	P	
#7	45	4.170	1	800	P	
#8	45	4.171	1	800	P	
#9	45	4.168	2	800	P	
#10	45	4.169	2	800	P	

Supplementary information:
¹⁾ Identify one of the following:
 1: Nickel particle inserted between positive and negative (active material) coated area.
 2: Nickel particle inserted between positive aluminium foil and negative active material coated area.
 - No fire or explosion
 - No leakage
 - Leakage
 - Fire
 - Explosion
 - Bulge
 - Others (please explain)

-- End of Report --

Type Designation: SZNS18650-2500mAh

Report No.: 17044062 001

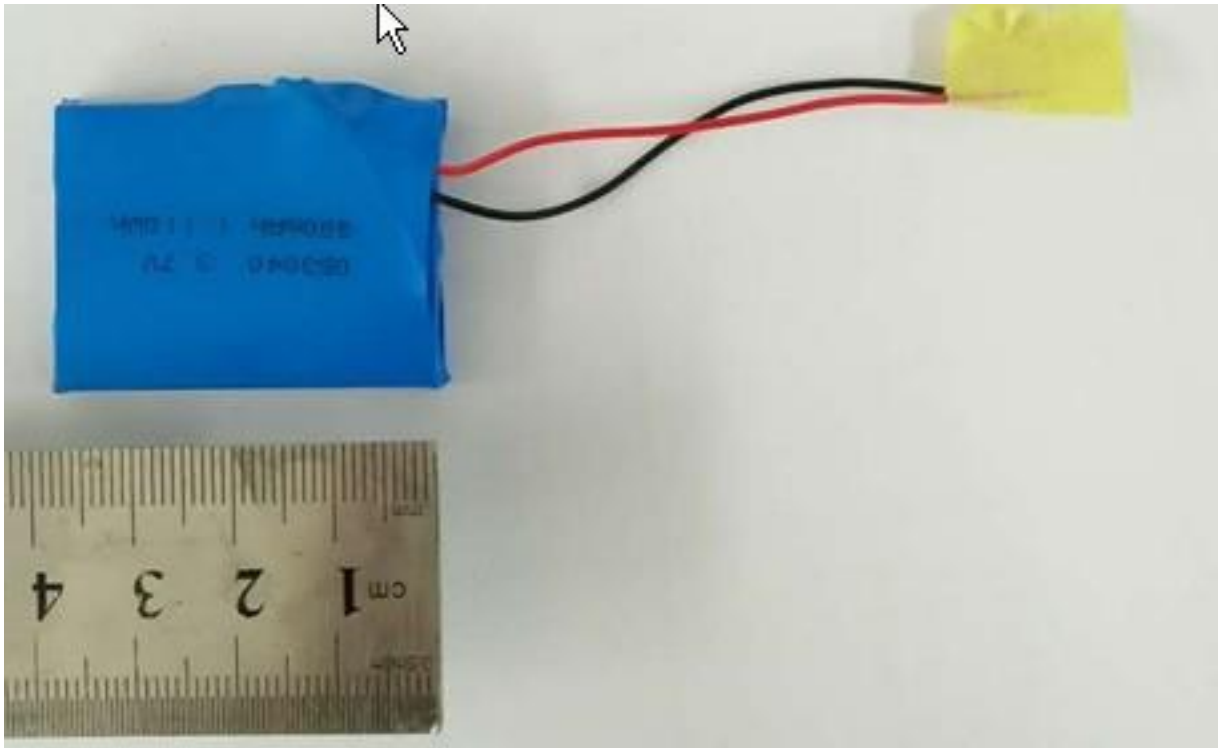


Figure 1 Front view of cell

Type Designation: SZNS18650-2500mAh

Report No.: 17044062 001

Figure 3 View of label